


# PC85

the next generation  
of mobile concrete mixers

FOR MORE DETAILS

+1 855.335.9500

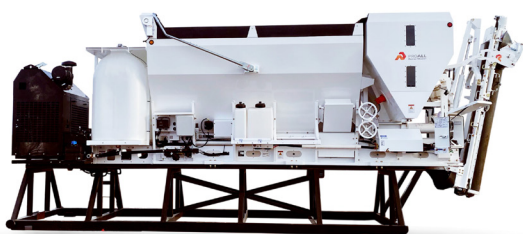

## PC85 MODEL

The PC85 mixer by ProAll is a versatile and efficient precast concrete mixing machine, enabling on-site production with precise material measurements and customizable batch sizes for optimal flexibility in construction projects.

## ADDITIONAL OPTIONS

### Body

- ☐ Aggregate Bin Liner
- ☐ 360° Swivel Chute
- ☐ Aluminum Tool Box
- ☐ Aerator System for Cement Bin
- ☐ Larger Cement Bin
- ☐ Pneumatic Fill
- ☐ Dual Water Tank Fill
- ☐ Fly Ash Bin

### Safety

- ☐ Standard System Rear Ladder & Platform
- ☐ Cement Bin Safety Rail

### Verification

- ☐ Belt Materials Sensors
- ☐ Gate Height
- ☐ Verification Sensors
- ☐ Load Cell System

### Application

- ☐ Additional Vibrators
- ☐ Color Feeder
- ☐ Fiber Feeder
- ☐ Gunite Auger
- ☐ Heat Exchanger
- ☐ Additional Admix Tanks

### Additional

- ☐ Pressure Washer
- ☐ Custom Paint
- ☐ Extra Oil Cooler
- ☐ Auto-Lube System
- ☐ PTO and Installation of PTO

## HIGHLIGHTED SPECIFICATIONS

|                        |                                             |
|------------------------|---------------------------------------------|
| Production Capacity    | Up To 7.6m <sup>3</sup> / 10yd <sup>3</sup> |
| Hourly Production Rate | Up To 50m <sup>3</sup> /65yd <sup>3</sup>   |
| Aggregate Bin          | 5.2m <sup>3</sup> / 184ft <sup>3</sup>      |
| Sand Bin               | 4.6m <sup>3</sup> / 161ft <sup>3</sup>      |
| Cement Bin             | 3.2m <sup>3</sup> / 113ft <sup>3</sup>      |
| Water Tank             | 2500L / 600gal                              |

## STANDARD FEATURES

|                        |                                |
|------------------------|--------------------------------|
| Wireless Remote        | Variable Speed Cement Metering |
| Automated Admix System | Automated Chain Oil            |
| Batch Ticketing System | Aluminum Fenders               |
| Electronic Tarp System | Automated Electric Vibrators   |
| Automated Water System |                                |

## OUR ADVANTAGE



### Accuracy

Our Commander automated control system ensures accurate and consistent concrete production.



### Operator Design

Commander prioritizes operator ease, offering a user-friendly interface and intuitive controls for seamless operation.



### Customer Support

ProAll offers reliable customer support, providing prompt assistance for any inquiries or technical issues.

**GET IN  
TOUCH**



Sales: 1.855.335.9500  
Parts: 1.855.335.9500  
Support: 1.833.577.6255




Sales: Proall.Info@Terex.com  
Parts: Proall.Parts@Terex.com  
Support: Proall.Support@Terex.com



Visit: [www.Proallinc.com](http://www.Proallinc.com)



Discover more about our options and how they can improve your businesses needs.

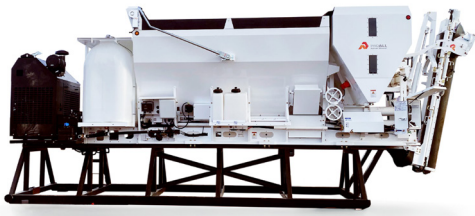

## PC85 MODEL

The PC85 mixer by ProAll is a versatile and efficient precast concrete mixing machine, enabling on-site production with precise material measurements and customizable batch sizes for optimal flexibility in construction projects.

### Standard Features

|                              |                                               |
|------------------------------|-----------------------------------------------|
| Model                        | PC85                                          |
| Product Capacity             | 7.6m <sup>3</sup> / 10yd <sup>3</sup>         |
| Production Rate              | 50m <sup>3</sup> /hr (65yd <sup>3</sup> / hr) |
| Cement Bin                   | 3.2m <sup>3</sup> / 113ft <sup>3</sup>        |
| Water Tank                   | 2500 L / 600 US gal                           |
| Aggregate Bin A              | 5.2m <sup>3</sup> / 184ft <sup>3</sup>        |
| Aggregates Bin B             | 4.6m <sup>3</sup> / 161ft <sup>3</sup>        |
| Admix Tank 1                 | 40L / 10 gal                                  |
| Admix Tank 2                 | 80L / 20 gal                                  |
| Mixing Auger Diameter/Length | (228mm) 9" / (2438mm) 96"                     |
| Operator Control             | Console/ Wireless                             |
| Control System               | Commander                                     |
| Drive                        | By truck PTO                                  |
| Two Way Remote               | On-board remote                               |
| Tarp Cover                   | Mesh                                          |
| Delivery Printer             | On-board printer                              |
| P85 Unit Length              | 6096mm / 240"                                 |
| P85 Unit Height              | 2477mm / 97.5"                                |
| P85 Unit Working Swing       | 120 degree                                    |
| P85 Unit Weight (dry weight) | *5180 kg / 11420 lbs                          |
| Chain Lubrication            | Automated                                     |
| Water System                 | Automated                                     |
| Vibrators                    | Electric                                      |
| Hydraulic Pumps              | High Efficiency Piston Pumps                  |

\* depending on mounting configuration

