





# **P95 MODEL**

The P95 is a versatile and efficient concrete mixing machine that allows for on-site production, precise material measurements, and customizable batch sizes.

## HIGHLIGHTED SPECIFICATIONS

Production Capacity 9.2m³ / 12yd³
Hourly Production Rate 70m³/90yd³
Aggregate Bin 6.3m³ / 221ft³
Sand Bin 5.5m³ / 193ft³
Cement Bin 3.2m³ / 113ft³
Water Tank 2250L / 600gal

## STANDARD FEATURES

Wireless Remote Two Automated Admix System Batch Ticketing System Automated Water System High Efficiency Hydraulic Pump

Variable Speed Cement Metering Automated Chain Oil Aluminum Fenders Automated Electric Vibrators Black Mesh Aggregate Tarp

## **ADDITIONAL OPTIONS**

#### Body

- Aggregate Bin Liner
- 360° Swivel Chute
- Aluminum Tool Box
- Aerator System for Cement Bin
- Larger Cement Bin
- Pnuematic Fill
- ☐ Dual Water Tank Fill
- ☐ Split Cement/Fly Ash Bin

## Saftey

- Standard System Rear Ladder& Platform
- ☐ Cement Bin Saftey Rail

#### Verification

- ☐ Belt Materials Sensors
- ☐ Gate Height
  - Verification Sensors
- Load Cell System
- Low Level Cement Sensor

### **Application**

- Additional Vibrators
- Color Feeder
- Fiber Feeder
- ☐ Gunite Auger
- Heat Exchanger
- Additional Admix Tanks

#### Additional

- Pressure Washer
- Custom Paint
- ☐ Extra Oil Cooler
- Auto-Lube System
- ☐ PTO and Instillation of PTO
- Washout Kit



Discover more about our options and how they can improve your businesses needs.

# **OUR ADVANTAGE**



Accuracy

Our Commander automated control system ensures accurate and consistent



Operator Design

Commander prioritizes operator ease, offering a user-friendly interface and intuitive controls for seamless operation.



Customer Support

ProAll offers reliable customer support, providing prompt assistance for any inquiries or technical issues.





Sales: 1.855.335.9500 Parts: 1.855.335.9500 Support: 1.833.577.6255



Sales: Proall.Info@Terex.com Parts: Proall.Parts@Terex.com Support:Proall.Support@Terex.com



Visit: www.Proallinc.com




## **P95 MODEL**

The P95 is a versatile and efficient concrete mixing machine that allows for on-site production, precise material measurements, and customizable batch sizes.


## **Standard Features**

Model	P95
Product Capacity	9.2m <sup>3</sup> / 12yd <sup>3</sup>
Production Rate	70m <sup>3</sup> /hr (90yd <sup>3</sup> / hr)
Cement Bin	3.2/3.6m <sup>3</sup> / 113/133ft <sup>3</sup>
Water Tank	2250 L / 600 US gal
Agggregate Bin A	6.3m <sup>3</sup> / 221ft <sup>3</sup>
Aggregates Bin B	5.5m <sup>3</sup> / 193ft <sup>3</sup>
Admix Tank 1	40L / 10 gal
Admix Tank 2	80L / 20 gal
Mixing Auger Diameter/Length	(228mm) 9"/ (2438mm) 96"
Operator Control	Console/ Wireless
Control System	Commander 2.0
Drive	By truck PTO
Two Way Remote	On-board remote
Tarp Cover	Mesh
Delivery Printer	On-board printer
P95 Unit Length	7696mm / 303"
P95 Unit Height	2463.8mm / 97"
P95 Unit Working Swing	120 degree
P95 Unit Weight (dry weight)	*5502 kg / 12123 lbs
Chain Lubrication	Automated
Water System	Automated
Vibrators	Electric
Hydraulic Pumps	High Effeciency Pumps

<sup>\*</sup> depending on mounting configuration

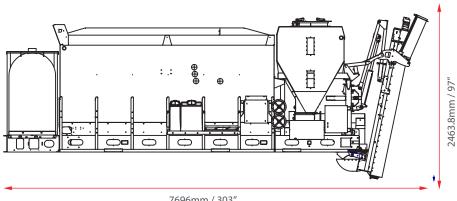





2294mm / 90 5/16"

